

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/003504 A2

(51) International Patent Classification⁷: **E21B**

(21) International Application Number:
PCT/US2004/020584

(22) International Filing Date: 25 June 2004 (25.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/482,610 27 June 2003 (27.06.2003) US

(71) Applicant and

(72) Inventor: **TORRES, Carlos, A.** [US/US]; 748 Blalock
Road, Houston, TX 77024 (US).

(74) Agent: **TORRES, Carlos, A.**; Browning Bushman, P.C.,
5718 Westheimer, Suite 1800, Houston, TX 77057 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM, METHOD AND APPARATUS FOR SECURING CONTROL LINES TO A WELL PIPE

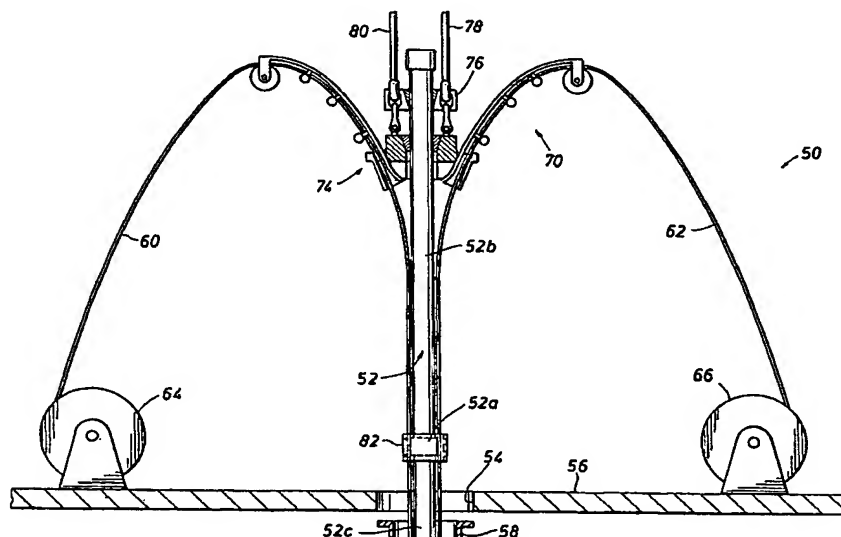

(57) Abstract: Control lines extend vertically through lateral spaces formed between a rig floor and a pipe holding assembly supported on the rig floor. A pipe string held by an elevator extends vertically through the pipe holding assembly into the well. The pipe holding assembly is raised vertically off of the floor, about the pipe string, to allow the control lines to be clamped to the pipe string below the pipe holding assembly. The invention permits the control lines to be clamped to the pipe string without passing through the pipe handling assembly to prevent damage to the control lines when the pipe handling assembly is closed to secure the pipe string.